

Dual-polarized (with connectors) parabolic antenna JRMD-680-6 MIMO is designed for links with MIMO mode at the frequency band 6 GHz. Its design with deep dish increases isolation among antennas on a mast and increases front to back ratio.

Electrical parameters:

5.9 - 7.125 GHz **Frequency range**

Gain $30.5 \pm 1 \, dBi$

Front to back ratio ≥ 45 dB

Beamwidth -3 dB 4.6°

VSWR ≤ 1.6

Polarization Linear, vertical/horizontal or 45°

Mechanical parameters:

Parabola ø 68 cm, Aluminium alloy

Radome UV steady plastic ABS

Type of connectors R-SMA or N

Fine setting polarization ± 5°

Installation on mast ø 40 - 120 mm

Operating wind load 180 km/h (112 mph)

Survival wind load 240 km/h (149 mph)

Weight of antenna 5.7 kg (12.6 lbs.)

> of holder 3.2 kg (7.0 lbs.)

Shipping dimension 800 x 800 x 350 mm/ 13 kg (28.7lbs.)



Usage:


- deep parabola for better parameters
- easy to assembly: first the holder and then the antenna only by 2 screws
- fine setting elevation (of gradient) and azimuth ± 20°
- extreme wind stability

The antenna is supplied with a holder that allows easy mounting on a mast. The holder can be installed separately on the mast. Subsequently, you can simply hang up the antenna with microwave unit into it. The holder allows precise adjustment in both directions. Ready for right and left side mounting.

In the areas with the expected occurrence of the strong winds mounting on the mast with minimal Ø 50 mm is recommended.




Measurement of radiation pattern:

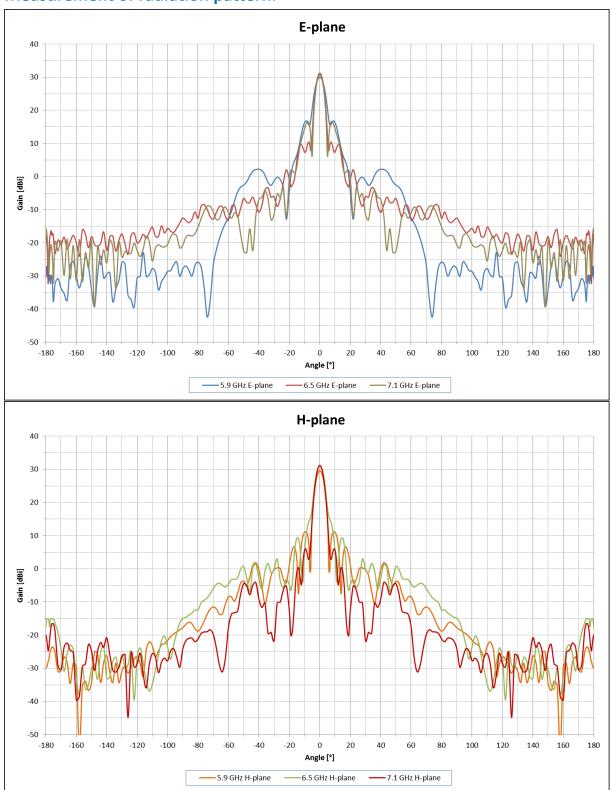




Outline:

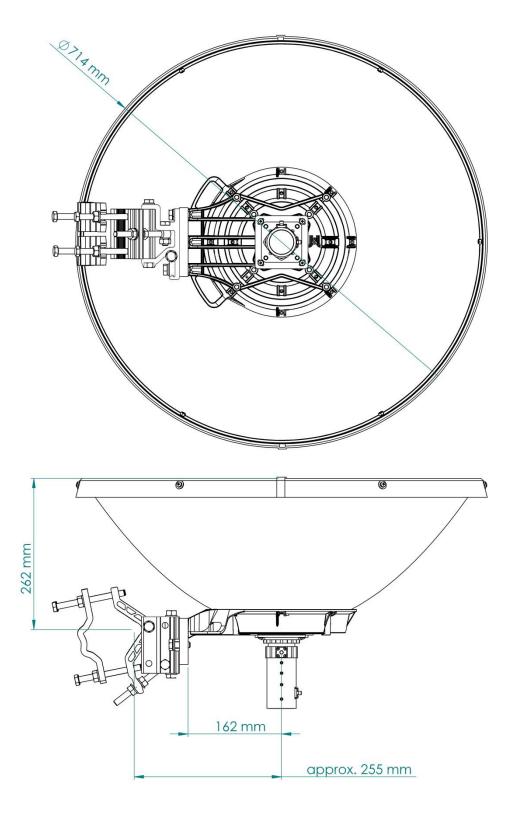



Wind loading:

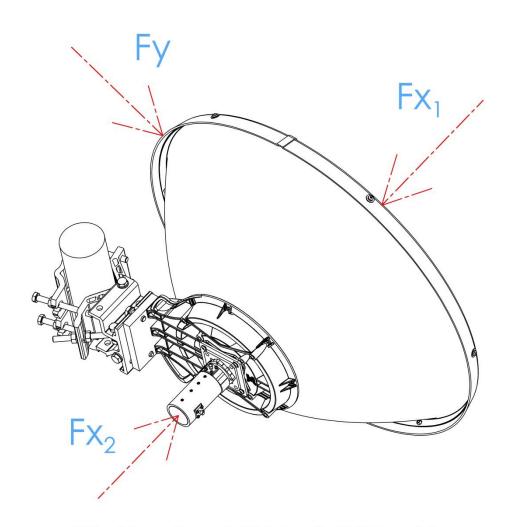

Wind Loading at 200 km/h [125 mph]

No. 100 Per 10		
Direction	Force [N]	Force [lbf]
Fx ₁	707	159
Fx ₂	792	178
Fy	71	16