

Dual-polarized parabolic antenna JRC-24DD DuplEX is designed for directional links with full-duplex mode or MIMO mode at the frequency band 5 GHz with high isolation level. The antenna is designed for medium and short distances in difficult conditions. Its design with deep dish increases isolation among antennas on a mast and increases front to back ratio. The SX version includes a stainless steel holder for adverse corrosive conditions.

Other models: JRC-24DD DuplEX – standard deep dish DuplEX antenna

JRC-24DD DuplEX Precision – antenna with precision holder JDMW-900 AR

Electrical parameters:

Frequency range 4.9 – 6.1 GHz

Gain 24.5 ± 1 dBi

VSWR $_{5.1-5.9 \text{ GHz}} \leq 1.6$

Beamwidth _{-3 dB} 9.0°

Port to port isolation $5.1-5.9 \, \text{GHz}$ $\geq 50 \, \text{dB}$ (typ. 53 dB) (rest of the freq. range $\geq 43 \, \text{dB}$)

Front to Back ratio ≥ 44 dB

Polarization Linear, vertical/horizontal or 45°

Mechanical parameters:

Parabola Ø 400 mm, Aluminium alloy

Radome UV steady plastic ABS

Type of connector N-female, R-SMA

Installation for mast Ø 27 - 74 mm


Weight of antenna 2.5 kg (5.5 lbs.)


Shipping dimensions - 2 pcs 460 x 460 x 190 mm / 5.8 kg (12.8 lbs.)

The antenna can be used in combination with the outdoor metal box JR - 350 Alu for AP, RouterBOARDs and other electronics or with holder GentleCLIP for easy installation devices with the clipped system. The antenna has separate latching nuts for easy mounting and adjustment of the azimuth and elevation. Right and left side mounting possible.




Measurement of radiation pattern:

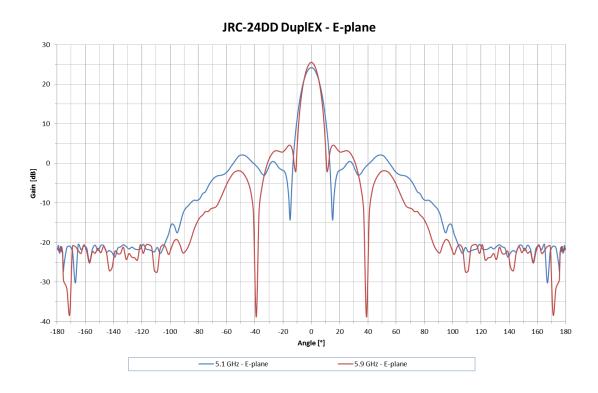

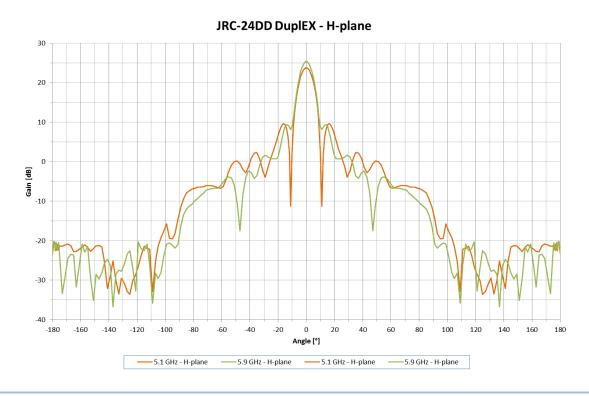




Outline:

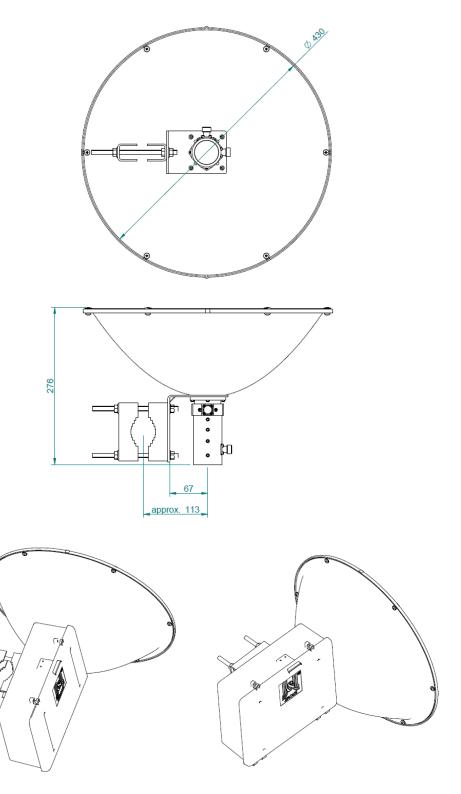

Accessories: outdoor metal box JR – 350 Alu – right side mounting only, polarization 45° not possible



Wind loading:

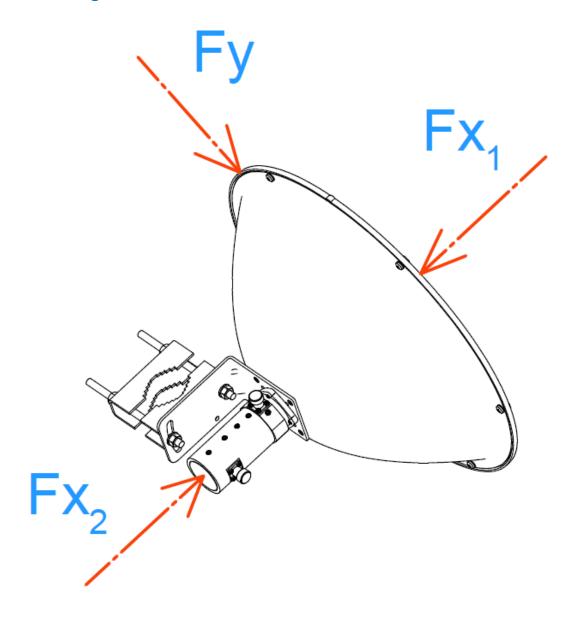

| Wind Loading at 250 km/h (125 mph) | | |
|------------------------------------|-----------|-------------|
| Direction | Force [N] | Force [lbf] |
| Fx1 | 344 | 77,3 |
| Fx2 | 313 | 70,3 |
| Fy | 17 | 4 |